

PEACEFLOW300

Peaceflow300 provides acoustics and airflow for equipment

DESIGN




- Can be fitted to any sides of Configured Platforms systems.
- Prestigious louvre profile.
- All aluminium components with stainless steel fixings – backed by a 20 year warranty.
- Standard Heights: 1000mm, 1200mm & 1500mm
- Aluminium louvres 150mm repeat pitch.
- Complies to BS EN 516 2006 and BS EN 1090-3 2008
- Typical weight 26kg/m²
- Louvres will be supplied in pre-assembled modules. Fixings will be provided for fixing to system.

SPECIFY CONFIGURED PLATFORMS

- Provide Peaceflow300 where required to screen off equipment, and allow airflow with acoustics.

SPECIFICATION

- Louvre blade colours available in all RAL and BS colour ranges with polyester powder coat to 40 microns thickness.
- Free area range of 36% - 46%
- Materials: Grade 6063 T6 aluminium & A2 stainless steel fixings.

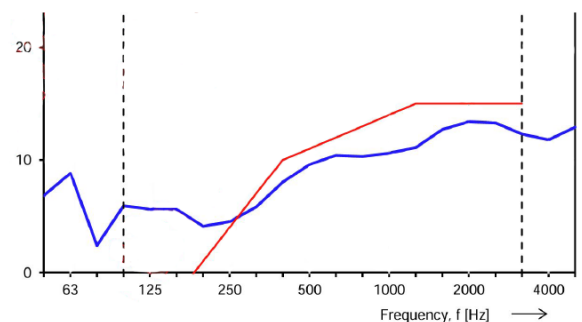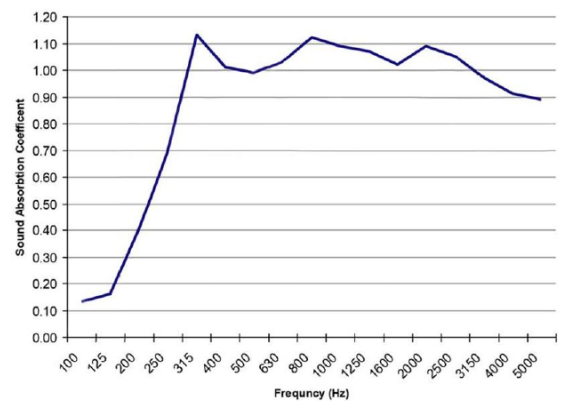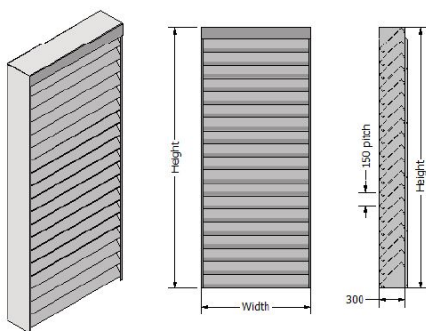

Performance

| Acoustic Data | dB in each Octave Band Centre Frequency (Hz) | | | | | | | |
|-------------------------------------|--|-----|-----|-----|------|------|------|------|
| | 63 | 125 | 250 | 500 | 1k | 2k | 4k | 8k |
| Sound reduction index | 8.8 | 5.6 | 4.5 | 9.6 | 10.6 | 13.4 | 11.8 | 13.9 |
| Weighted sound reduction index (Rw) | 11 | | | | | | | |

Office: +44 (0) 113 276 0450
Mobile: +44 (0) 738 503 1263

Unit 7 Velocity Point,
Castleton Road, Leeds,
LS12 2EN

customerservice@configuredplatforms.co.uk
rick@configuredplatforms.co.uk