

PEACEFLOW300

Peaceflow300 provides acoustics and airflow for equipment

DESIGN


- Can be fitted to any sides of Configured Platforms systems.
- Prestigious louvre profile.
- All aluminium components with stainless steel fixings – backed by a 20 year warranty.
- Standard Heights: 1000mm, 1200mm & 1500mm
- Aluminium louvres 150mm repeat pitch.
- Complies to BS EN 516 2006 and BS EN 1090-3 2008
- Typical weight 26kg/m²
- Louvres will be supplied in pre-assembled modules. Fixings will be provided for fixing to system.

SPECIFY CONFIGURED PLATFORMS

- Provide Peaceflow300 where required to screen off equipment, and allow airflow with acoustics.



SPECIFICATION

- Louvre blade colours available in all RAL and BS colour ranges with polyester powder coat to 40 microns thickness.
- Free area range of 36% - 46%
- Materials: Grade 6063 T6 aluminium & A2 stainless steel fixings.

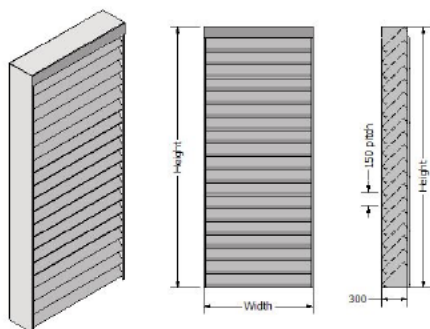

NRC-1.0

Rw11dB

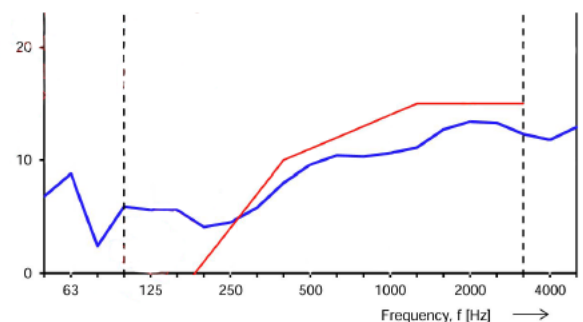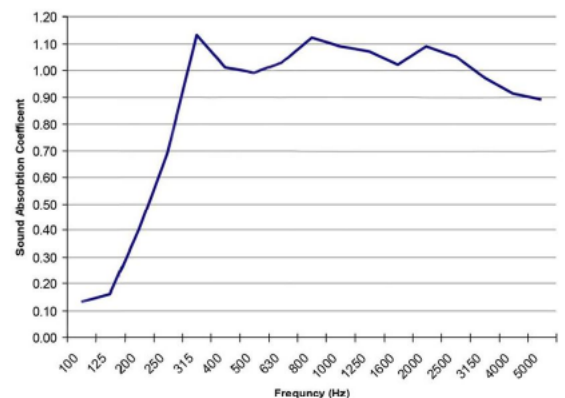

Performance

Acoustic Data	dB in each Octave Band Centre Frequency (Hz)							
	63	125	250	500	1k	2k	4k	8k
Sound reduction index	8.8	5.6	4.5	9.6	10.6	13.4	11.8	13.9
Weighted sound reduction index (Rw)	11							

Office: +44 (0) 113 276 0450
Rick: +44 (0) 738 503 1263

7 Velocity Point, Castleton Road,
Leeds, LS12 2EN

customerservice@configuredplatforms.co.uk
rick@configuredplatforms.co.uk