

SERIES 3

Series 3 Configured Platforms are ideal for **Steep Pitched Roofs** or where **Elevation** is required



DESIGN


- Extra height increases air-flow to improve equipment's performance and longevity.
- Provides access under platform for routine inspections and maintenance.
- Compatible with steep pitched roofs and saw-toothed roofs.
- Added height allows for easy integration of equipment with vertical discharge ducts.
- Generations ahead of conventional structural steel platforms.
- All aluminium components with stainless steel fixings backed by a 20 year warranty.
- Unique design distributes the load evenly, reducing the structural requirements of the roof.
- Live load rated to 2.5 kPa
- Light weight 20 kg / m²
- Complies to BS EN 516 2006 and BS EN 1090-3 2008
- A1 fire rated

VERSATILITY

- Penetration free making placement and position on the roof flexible.
- Configurable online in 600mm increment sizes in width and length to suit your requirements.
- Pitch is configurable to suit the roof requirement
- The lightweight aluminium design makes it easy for carrying, craning and assembly.

EFFICIENCY

- Our agile systems mean that platforms are ready to ship within a day or two of order.
- Kit form allows them to be assembled by a trade already on site with our easy to follow installation manual.
- Take the stress out of your project with our nationwide approved installer network.

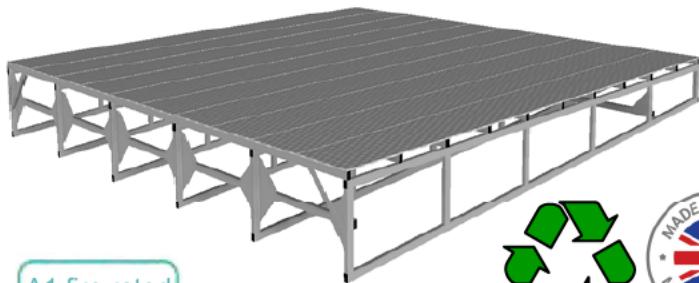

MOUNTING TAPE OPTIONS

Either Neoprene Foam Rubber Tape or VHB Foam Tape is pre-stuck to the underside of each Frame, depending on whether or the platform is to be adhered to the roof surface or not.

SPECIFY CONFIGURED PLATFORMS

- Provide Series 3 Configured Platforms
- Size to suit plant, equipment and roof pitch, whilst allowing sufficient area around the units for access and maintenance.

OPTIONAL SURROUNDS

Each of these surround options can be provided to any of the 4 sides of the Series 3 Platform in 600mm increments.

- **Guardrail** - For edge protection recommended where any platform sides are higher than 300mm from the adjacent roof surface.
- **Standard Screen Wall** - For aesthetic screening of the plant, equipment and ductwork.
- **Soundshield** - For aesthetic screening and acoustic attenuation by reflection.
- **Peacemaker** - For aesthetic screening and acoustic attenuation by absorption.
- **Acoustic+** - For aesthetic screening and acoustic attenuation by reflection and absorption.

