


PARASCREEN

Parapet fixed screen system.

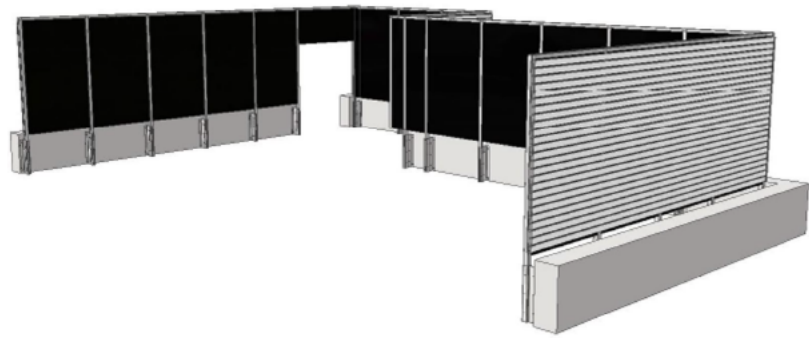

CONCEPT

- Screen system fixed to the inside face of a parapet. Ideally suited to precast concrete parapet construction and can be adapted for other construction situations.
- The Parascreeen system does not require penetration through the weatherproof membrane to the horizontal surface.
- The Parascreeen system can incorporate any surround type from our range including slatted, louvre screening or acoustic properties.

DESIGN

- Available in height and length to suit site survey requirements.
- Parascreeen is able to be installed on existing or new parapet construction situations.
- The brackets are designed to allow for insulation buildup and weatherproofing to the internal face of a parapet.
- Complements our plant platform range perfectly and can be integrated so that screens connect seamlessly regardless whether the other screen sections are mounted on a platform or on the ballasted Parascreeen system.
- The Parascreeen system is available with 125mm or 225mm offset sizes. (The offset size is measured from the fixing face on the inside of the parapet to the outside face of the screen post)
- All aluminium components with stainless steel fixings – backed by a 20 year warranty.
- Designed according to EN 1991-1-4:2005+A1:2010 Section 7.4.1 and complies to BS EN 516 2006 and BS EN 1090-3 2008
- A1 fire rated / powder coated items A2 fire rated

SUPPLY

- The screen system benefits from a short lead time for manufacture and is quick to install on site.
- Supplied in kit form with all fixings, site specific drawings and instructions.
- Take advantage of our approved installer network for an efficient and stress-free installation.

A1 fire rated/
A2 fire rated



SPECIFICATION REQUIREMENTS

- Parascreeen system by Configured Platforms Ltd
- Height of screen and screen type.
- Height of top of parapet from roof surface.
- Type of parapet construction.
- Length of screen or dimensions if it is to form and enclosure.
- Position or quantity of access doors or gaps if required.

SCREEN TYPE CHOICE

- Each of the surround options used on our platforms can be applied to the Speedscreen system.
- Guardrail – To create a safe area for service personnel.
 - Standard Screen Wall – For aesthetic screening of plant, equipment and/or ductwork.
 - Soundshield – For aesthetic screening and acoustic attenuation by reflection.
 - Peacemaker – For aesthetic screening and acoustic attenuation by absorption.
 - Acoustic+ – For aesthetic screening and acoustic attenuation by reflection and absorption.

Office: +44 (0) 113 276 0450
Rick: +44 (0) 738 503 1263

7 Velocity Point, Castleton Road,
Leeds, LS12 2EN

customerservice@configuredplatforms.co.uk
rick@configuredplatforms.co.uk