STANDARD SCREEN

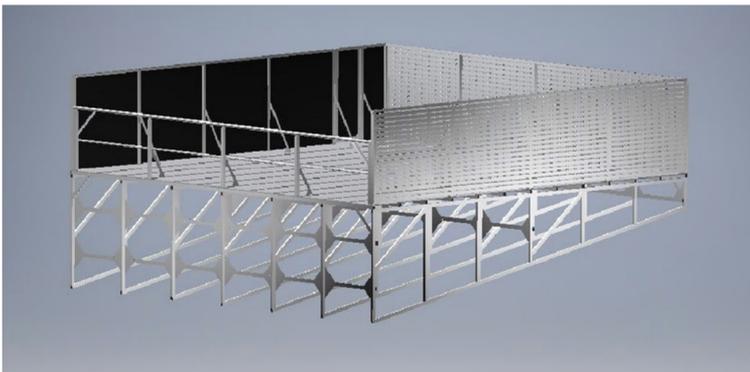Standard Screen aesthetically hides equipment, ductwork and pipework

DESIGN

· Can be fitted to any sides of Series 1, 2 or 3 Platforms and to any 600mm increment from the corners.
· Clean straight lines for a tidy look.
· All aluminium components with stainless steel fixings – backed by a 20 year warranty.
· Standard Heights: 1200mm, 1600mm, 2000mm & 2400mm
· Aluminium slats 65x15mm placed at 80mm horizontal repeat pitch. Can be applied to top screen section only for parapet situations.
· Super lightweight 7kg/m²
· Free area: 18.75%
· Complies to BS EN 516 2006 and BS EN 1090-3 2008

EFFICIENCY

· Kit form allows them to be assembled by a trade already on site with our easy to follow installation manual.
· Take the stress out of your project with our nationwide approved installer network.
· The lightweight aluminium design makes it easy for carrying, craning and assembly.

SPECIFY CONFIGURED PLATFORMS

· Provide Standard Screen where aesthetically required to screen off equipment, ductwork, and pipework.

OPTIONAL ACCESS GAP OR GATE

· An access gap of any 600mm increment wide is configurable in the Standard Screen.
· A Self Closing Access Door 600mm wide is configurable in the Standard Screen.
· A Self Closing Double Access Door 1200mm wide (2 x 600mm doors) is configurable in the Standard Screen.
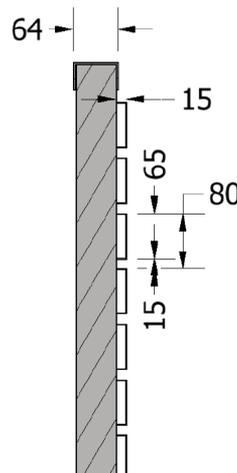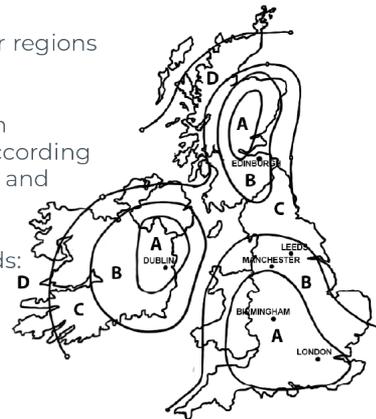
WIND LOADS

Standard Screen is suitable for regions A, B, C & D.

Pre-engineered factors: Terrain category, area wind velocity according to EuroCode 1, building height and screen height.

Basic mean hourly wind speeds:
· Region A - 22m/s
· Region B - 24m/s
· Region C - 25m/s
· Region D - 27m/s

SPECIFICATION

· Slat colours available in all RAL and BS colour ranges with polyester powder coat to 40 microns thickness.

· Materials: Grade 6063 T6 aluminium & A2 stainless steel fixings.

Office: +44 (0) 113 276 0450
Mobile: +44 (0) 738 503 1263
17 Millshaw Park Avenue, Leeds, UK, LS11 0LR
customerservice@configuredplatforms.co.uk
rick@configuredplatforms.co.uk

SERIES2 SERIES3
"the power is at your fingertips"