

SERIES 2

Series 2 Configured Platforms are designed for Flat Roofs



DESIGN


- Free standing design eliminates penetrations keeping the roof membrane leak free.
- Unique design distributes the load evenly, reducing the structural requirements of the roof.
- All aluminium components with stainless steel fixings – backed by a 20 year warranty.
- Each height adjustable 304 stainless steel base has a plastic outer shell, a rubber anti-vibration pad and a stainless steel convex stub and concave disc to allow for the drainage contours of the roof.
- Live load rated to 2.5 kPa
- Super lightweight 18 kg / m²
- Complies to BS EN 516 2006 and BS EN 1090-3 2008
- A1 fire rated (framing) / B2 fire rated (support feet)

VERSATILITY

- Penetration free making placement and position on the roof flexible.
- There is 100mm of vertical height adjustment in each base to allow the platform to be levelled across the drainage contours of the roof.
- Configurable online in 600mm increment sizes in width and length to suit your requirements.
- The lightweight aluminium design makes it easy for carrying, craning and assembly.

EFFICIENCY

- Our agile systems mean that platforms are ready to ship within a day or two of order.
- Kit form allows them to be assembled by a trade already on site with our easy to follow installation manual.
- Take the stress out of your project with our nationwide approved installer network.

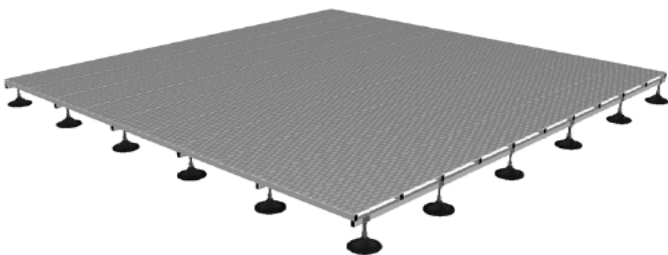


SPECIFY CONFIGURED PLATFORMS

- Provide Series 2 Configured Platforms
- Size to suit plant and equipment whilst allowing sufficient area around the units for access and maintenance.

OPTIONAL SURROUNDS

Each of these surround options can be provided to any of the 4 sides of the Series 2 Platform in 600mm increments.

- **Guardrail** - For edge protection recommended where any platform sides are higher than 300mm from the adjacent roof surface.
- **Standard Screen Wall** - For aesthetic screening of the plant, equipment and ductwork.
- **Soundshield** - For aesthetic screening and acoustic attenuation by reflection.
- **Peacemaker** - For aesthetic screening and acoustic attenuation by absorption.
- **Acoustic+** - For aesthetic screening and acoustic attenuation by reflection and absorption.

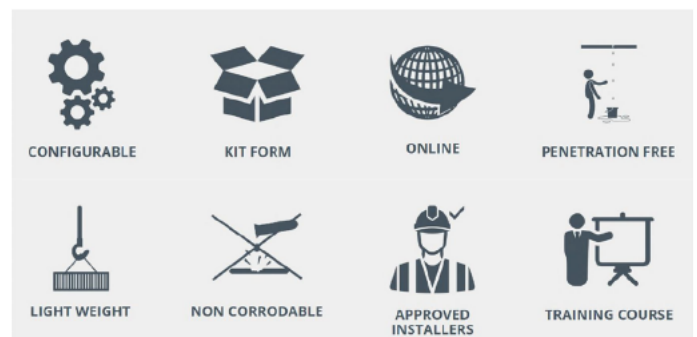

A1 fire rated/
B2 fire rated



Office: +44 (0) 113 276 0450
Rick: +44 (0) 738 503 1263

7 Velocity Point, Castleton Road,
Leeds, LS12 2EN

customerservice@configuredplatforms.co.uk
rick@configuredplatforms.co.uk